




Raft Cover Tie-Down Instructions

ALL side loops must be strapped to trailer or connected under the raft to the strap/loop on the opposite side.

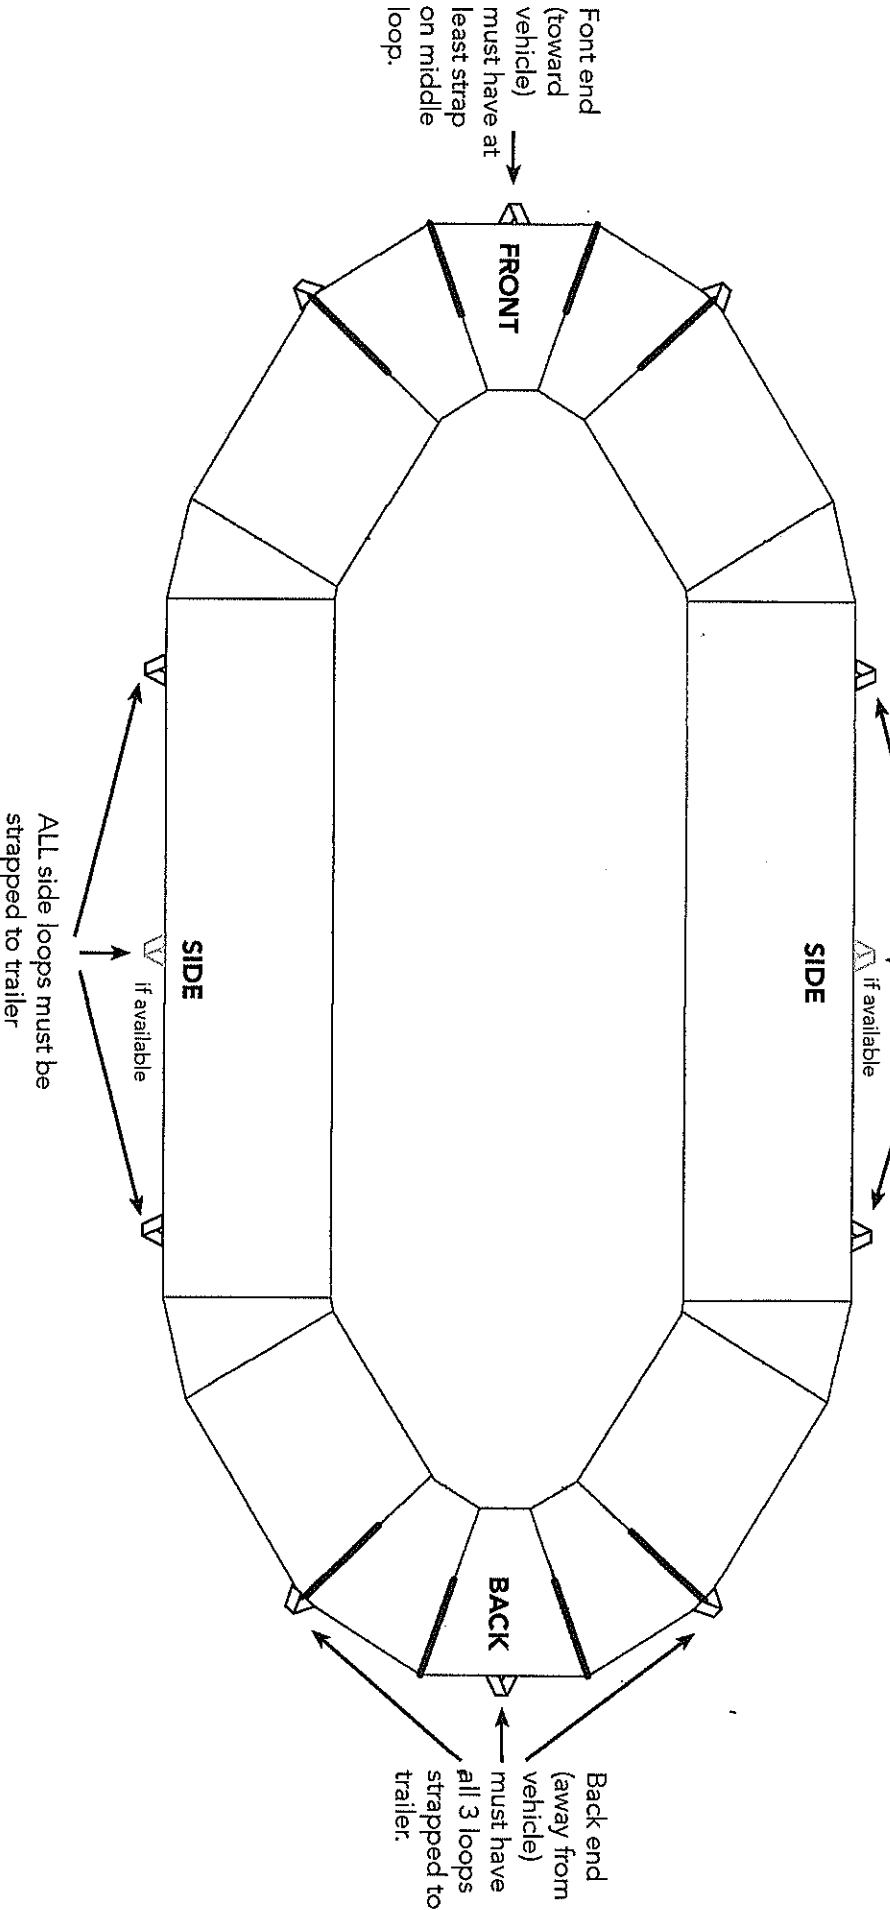

It is important to follow ALL of these tie-down instructions in order to correctly cover your raft and prevent damage to your raft cover during transport.

There are 3 tie-down loops at each end of the covers, and 2 or 3 on each side depending on the model.

All raft covers from Whitewater Designs come with 12 tie-down straps. There are 10-12 tie-down loops per cover: 10 for #1202 and #1203, 12 for #1200, #1201, and #1204.

1. Front end (toward vehicle) must have at least strap on middle loop
2. Back end (away from vehicle) must have ALL 3 loops strapped to trailer
3. ALL side loops must be strapped to trailer or connected under the raft to the strap/loop on the opposite side.